

XBW 3.0



Proudly made in the USA
Comes with 5-Year Warranty

For high throughput food production and processing facilities, the XBW 3.0 cleans the top and sides of boots and is ideal for any facility that is required to eliminate footwear as a vector for the spread of pathogens into clean zones. Automatically maintains required PPM kill level of sanitizing chemical.

Features

- Bidirectional Photoeye Operation
- Adjustable Sole Depth
- Tool-less Easy Brush Removal
- Ready Indicator Light
- Wash Indicator Light
- Main Power Shut Off Switch
- Soap Empty Indicator Light & Alarm
- Easy Clean Hygienic Design
- Non-Slip Surfaces
- Optional Heavy-Duty Brushes for Stubborn debris

Cycle Activation

Photoeye operation, Bidirectional

Water Consumption

0.3 - 0.5 gallons at an 8-second cycle

Plumbing Inlet

3/4" male garden hose, minimum 4 GPM, 100° F Max
40-50 PSI maximum, cold line (System equipped with a pressure regulator)

Drain

2" MNPT Drain Pipe. (Floor drain required.)

Solutions Storage

1 – 20 Liter sanitizing chemical container


Solutions

Required sanitizing solutions provided only by Meritech
(Other solutions will void warranty.)

Warranty (US Only)

5 Year Parts warranty

Warning: May not be used with any footwear with laces.

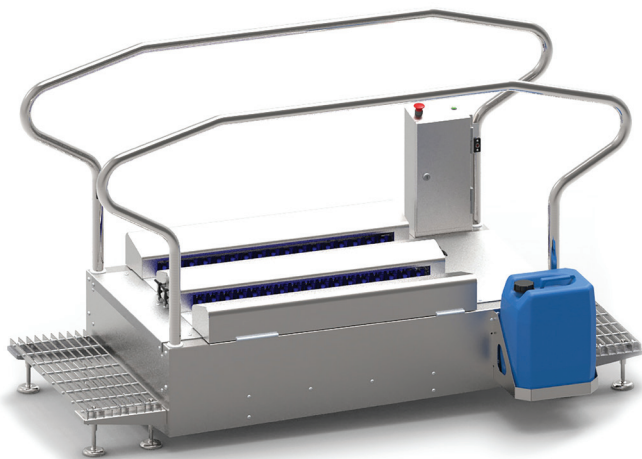

Electrical

120 VAC, 50/60 Hz, 1300 W running, 20 AMP breaker
International voltages available

Dimensions

34" width x 82" length x 48" height
44 3/8" width with soap basket

Horizontal Brush Length

35"

Weight

650 lbs. approximately

Shipping Weight

950 lbs.



Removes Debris &
Dangerous Pathogens



High Throughput up to
20 Employees per Minute



High pH Sanitizer to a Level
Between 800-1000 PPM

CleanTech Automated Handwashing and Bootwashing Systems are protected by the following U.S. Patents: U.S. Patent #5,265,628; #5,823,447; #7,607,442; #7,607,443; #7,617,830; #7,641,740; #7,659,824; #7,682,464; #7,698,770; #7,754,021; #7,754,022; #7,757,700; #7,758,701; other patents pending.

